

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

JC903 U.S. PTO
09/654165
09/01/00

Applicant: Itsuto NAKANISHI
Title: STACK INJECTION MOLDING
APPARATUS WITH SEPARATELY
ACTUATED ARRAYS OF VALVE
GATES
Appl. No.: New Application
Filing Date: September 1, 2000
Examiner: Unassigned
Art Unit: Unassigned

UTILITY PATENT APPLICATION
TRANSMITTAL

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Itsuto NAKANISHI

Enclosed are:

- ☒ [X] Specification, Claim(s), and Abstract (16 pages).
- ☒ [X] Formal drawings (11 sheets, Figures 1-12).
- ☒ [X] Unsigned Declaration and Power of Attorney (3 pages).
- ☐ [] Assignment of the invention to _____.
- ☐ [] Assignment Recordation Cover Sheet.
- ☐ [] Check in the amount of \$40.00 for Assignment recordation.
- ☐ [] Small Entity statement.
- ☐ [] Information Disclosure Statement.
- ☐ [] Form PTO-1449 with copies of ____ listed reference(s).

The filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$690.00	\$690.00
Total Claims:	40	- 20	= 20	x \$18.00	= \$360.00
Independents:	4	- 3	= 1	x \$78.00	= \$78.00
If any Multiple Dependent Claim(s) present:			+	\$260.00	= \$0.00
				SUBTOTAL:	= \$1128.00
[] Small Entity Fees Apply (subtract ½ of above):					= \$0.00
				TOTAL FILING FEE:	= \$1128.00

- [] A check in the amount of \$1128.00 to cover the filing fee is enclosed.
- [X] The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.
- [] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 19-0741. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Assistant Commissioner is authorized to charge the unpaid amount to Deposit Account No. 19-0741.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date September 1, 2000

FOLEY & LARDNER
Washington Harbour
3000 K Street, N.W., Suite 500
Washington, D.C. 20007-5109
Telephone: (202) 672-5570
Facsimile: (202) 672-5399

By

Alan I. Cantor

Alan I. Cantor
Attorney for Applicant
Registration No. 28,163

STACK INJECTION MOLDING APPARATUS WITH SEPARATELY ACTUATED ARRAYS OF VALVE GATES

This invention relates generally to stack injection molding and, more particularly, to
5 a stack molding system having a plurality of valve gates commonly actuated by a uniform
motion transferring mechanism.

BACKGROUND OF THE INVENTION

In multi-cavity stack injection molding systems, accurate control of resin melt flow
from a hot runner manifold to all of the mold cavities is essential to achieving uniformity of
10 the molded articles. The reciprocating valve pins used to control the gates to the cavities
typically are operated simultaneously, which requires even loading of the valve pins.
Compactness and simplicity of the machinery also are important considerations from the
standpoint of cost, reliability and efficient heat transfer.

Representative examples of known stack injection molding systems are disclosed in
15 U.S. patents 4,212,627; 4,244,909; 4,891,001; 5,013,235; 5,460,510; 5,478,230; and
5,533,882. Some of these employ a separate actuator for each valve pin, or a separate
actuator for each opposed pair of valve pins. U.S. patent 4,212,627 discloses a stack
molding arrangement wherein a single hydraulic actuator simultaneously moves all of the
valve pins of two arrays of injection nozzles through a complex multi-link slide bar
20 mechanism. This arrangement ensures simultaneous valve pin movement, but it tends to
require frequent maintenance and does not permit any flexibility in operation, such as
differential opening or closing of the two arrays of injection nozzles.

In single-face molding machines various arrangements are known for simultaneously
actuating a single array of valve pins. See, for example, U.S. 4,095,931 (sliding cam rod);
25 U.S. 4,330,258 and WO 00/43187 (rack and pinion drive); and JP 9141688 (reciprocating

plate). Other valve pin actuating mechanisms are disclosed in U.S. 4,378,963; U.S. 4,669,971; U.S. 4,712,995; U.S. 4,917,594; U.S. 4,923,387; U.S. 5,368,470; DE 3733363; DE 4230758; and DE 4231270. However, the technology used in such arrangements has not been of much benefit to stack molding apparatus, which generally tend to be complex, cumbersome, expensive, subject to premature wear, and/or unreliable. A need exists, therefore, for an improved stack molding apparatus that is durable and compact, allows for flexibility of operation, and efficiently and reliably produces molded products of good quality.

SUMMARY OF THE INVENTION

The present invention overcomes many of the disadvantages of the prior art by providing, in one aspect, an injection molding apparatus comprising a first array of injection nozzles and a second array of injection nozzles, each nozzle having a melt channel and a valve pin movable within the melt channel to open and close a mold gate. A melt distribution manifold is located between the first and second arrays of injection nozzles and is in fluid communication with the arrays of nozzles. Separate actuating assemblies are provided, one for displacing the valve pins of the first array of injection nozzles and another for displacing the valve pins of the second array of injection nozzles. Each actuating assembly comprises at least one actuator and a common linkage element driven by the actuator and linked to all of the valve pins of its respective array of injection nozzles to move the valve pins in unison.

In another aspect the invention provides an injection molding apparatus comprising an array of injection nozzles, and a melt distribution manifold in fluid communication with the array of injection nozzles. Each nozzle has a melt channel and a valve pin movable within the melt channel; and each valve pin has a driven portion and a tip end that controls

melt flow through a mold gate. An actuating assembly for displacing the valve pins of the array of injection nozzles comprises at least one actuator and a common linkage element driven by the actuator and linked to the driven portions of all of the valve pins of the array of injection nozzles to move the valve pins in unison, the actuator being located between the common linkage element and the tip ends of the valve pins.

Further objects and advantages of the invention will appear from the following detailed description taken together with the accompanying drawing figures.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a partial sectional view of a portion of a multi-cavity stack molding system according to a first embodiment of the invention, showing the valve pins in the open position;

FIG. 2 is a partial sectional view of the stack molding system of FIG. 1, showing the valve pins in the closed position;

FIG. 3 is an enlarged sectional view, taken along line 3-3 in FIG. 1, of a portion of the stack molding system of FIG. 1, showing the valve pins in the open position;

FIG. 4 is view similar to FIG. 3, taken along line 4-4 in FIG. 2, showing the valve pins in the closed position;

FIG. 5 is a partial sectional view of a portion of a multi-cavity stack molding system according to a second embodiment of the invention, showing the valve pins in the open position;

FIG. 6 is a partial sectional view of the stack molding system of FIG. 5, showing the valve pins in the closed position;

FIG. 7 is a partial sectional view of a portion of a multi-cavity stack molding system according to a third embodiment of the invention;

FIG. 8 is a partial sectional view of a portion of a multi-cavity stack molding system according to a fourth embodiment of the invention;

FIG. 9 is a partial sectional view of a portion of a multi-cavity stack molding system according to a fifth embodiment of the invention;

5 FIG. 10 is a partial sectional view of a portion of a multi-cavity single-face molding system embodying some of the features of the invention;

FIG. 11 is a detail sectional view of guiding and attachment elements useful in all of the above embodiments of the invention; and

10 FIG. 12 is a detail sectional view of an alternate form of guiding elements useful in all of the above embodiments of the invention.

DETAILED DESCRIPTION OF THE INVENTION

Reference is first made to FIG. 1 which shows a portion of a stack mold assembly 1 comprising a stationary, elongated and heated melt distribution manifold 2 having a central melt bore 20. Backing plates 3 surround manifold 2 and tightly abut one another. Above and below backing plates 3 are nozzle plates 4, each of which houses a plurality of valve gate nozzles 9 (here, four nozzles in a single row) mounted in separate nozzle bushings 21.

Referring to FIGS. 1 and 3, each valve gate nozzle 9 has a melt bore 10a that communicates at its outer (gated) end with a mold cavity 13, and at its inner end with central melt bore 20 in manifold 2 via a branch melt passage 25 in nozzle bushing 21. To keep the resin melt heated and thus insure that it flows from central melt bore 20 through each nozzle 9 to each cavity 13, electric heaters 22, 23, 24 are provided, respectively, in manifold 2, each nozzle bushing 21 and the body of each nozzle 9. Each valve gate nozzle 9 has a single valve pin 10 with a head 12. The front end of the pin 10, i.e., the end adjacent the gate, controls melt flow through the gate.

Nozzle plates 4 also house actuating assemblies 6. Each actuating assembly 6 comprises two double-acting hydraulic actuators 7 that flank the array of valve gate nozzles 9 that they actuate, each having a cap 15 at its outer end and driving a rod 16 at its inner end which extends from the internal piston of the actuator. A yoke plate 8 is disposed between manifold 2 and each array of valve gate nozzles 9, and is linked to rods 16 of the adjacent actuators 7. The heads 12 of valve pins 10 are engaged with their adjacent yoke plates 8. Movement of each yoke plate 8 by actuators 7 thus simultaneously moves the adjacent array of valve pins 10 between open and closed positions. Spacers 11 fixed to the ends of yoke plates 8 serve as stops for the yoke plates. The arrangement of actuators 7 and yoke plates 8 is symmetrical so that the forces applied by the actuators are evenly distributed.

FIG. 11 shows details of the connection of yoke plates 8 to rods 16, and the structure for guiding the yoke plates. Each rod 16 has a terminal portion 30 with a shoulder 32 and an internally threaded bore 34. Terminal portion 30 mates with a similarly shaped hole 18 in yoke plate 8. A washer 36 and a cap bolt 38 tightly secure yoke plate 8 to rod 16 so that they move as a unit.

Referring further to FIG. 11, each yoke plate 8 is guided by a plurality of guide pins 17 that are fixed to nozzle plates 4 and extend through holes 27 in the yoke plate. Guide pins 17 and holes 27 preferably have circular cross-sections, but other cross-sections may be used as long as they allow for a close sliding fit. An anti-friction element in the form of a bushing 19a lines each hole 27 such that there is a smooth sliding fit between pins 17 and holes 27. FIG. 12 shows an alternate arrangement wherein the anti-friction element is in the form of a sleeve carried on the outside of each pin 17. Either arrangement smoothly and

evenly guides the yoke plates 8 under the action of actuators 7, preventing warping of the yoke plates 8 and insuring uniform loading of the valve pins 10.

The anti-friction elements between pins 17 and holes 27 in yoke plates 8 can be made of any thermally stable, low-friction polymer. Examples include polyamide 6.0 or polytetrafluoroethylene (PTFE); or a composite polymeric composition, for example, metalfluoroplastic material; or a low-friction alloy, for example, sintered bronze. It is also possible to use a wear-resistant solid lubricating coating, for example, a polymeric, ceramic or hard metal coating capable of stable operation under conditions normally encountered during the injection molding process, and also capable of being fused either on the outside of pins 17 or on the inside of holes 27.

In use, a controlled external source of hydraulic fluid (not shown) connected to actuators 7 drives each linked pair of actuators in the same direction as required during the molding operation. FIG. 1 shows all of the valve gates in the open position, which allows resin melt to flow into all mold cavities 13. When the cavities are filled with resin, hydraulic pressure applied below the pistons of upper actuators 7 causes upper rods 16 to move upwardly and carry with them upper yoke plate 8, thus moving upper valve pins 10 upwardly in unison to close the upper valve gates and stop melt flow. Similarly, hydraulic pressure applied above the pistons of lower actuators 7 causes lower rods 16 to move downwardly and carry with them lower yoke plate 8, thus moving lower valve pins 10 downwardly in unison to close the lower valve gates and stop melt flow. The closed configuration is depicted in FIG. 2. After the molded articles are removed and it is desired to resume melt flow into the cavities 13, the process is reversed to open all of the valve gates, returning to the configuration of FIG. 1.

FIGS. 1 and 2 demonstrate that both arrays of valve gate nozzles are actuated simultaneously, all being either open or closed at the same time. In other words, melt injection occurs simultaneously through all of the valve gates. If desired, each array of valve gate nozzles may be independently controlled by a suitable hydraulic controller that would independently direct pressurized hydraulic fluid as desired to the pair of actuators 7 of each array of nozzles. Thus the gates of one array of nozzles may be held open to allow melt flow while the gates of the other array may be held closed to block melt flow.

A second embodiment of the invention is depicted in FIGS. 5 and 6. This embodiment has a layout similar to the first embodiment (like parts are denoted by like reference numerals), but movement of yoke plates 8 is effected by two-cylinder double-acting pneumatic actuators 207, instead of hydraulic actuators. Also, each heated valve gate nozzle 209 houses a plurality of valve pins 210, a central melt bore 210a and branch melt bores 210b which feed separate mold cavities 213. Of course, pneumatic actuators can be used in a stack mold arrangement having valve gate nozzles with single valve pins.

FIG. 7 depicts a third embodiment of the invention, in which like parts are denoted by like reference numerals. Here, a more elongated heated melt distribution manifold 302 has a plurality of central melt bores 320 that communicate with plural-pin heated valve gate nozzles 309, each of which feeds a single local mold cavity 313. Movement of each yoke plate 8 is effected by a single centrally located, two-cylinder, double-acting pneumatic actuator 307. Of course, centrally located pneumatic actuators can be used in a stack mold arrangement having valve gate nozzles with single valve pins.

FIG. 8 depicts a fourth embodiment of the invention which is identical to the embodiment of FIG. 7 (like parts are denoted by like reference numerals), except that conventional reversing electric motor actuators M effect movement of yoke plates 8.

FIG. 9 depicts a fifth embodiment of the invention that is similar to the embodiment of FIG. 7 (like parts are denoted by like reference numerals). However, movement of the upper yoke plate 8a is effected by a two-cylinder, double-acting pneumatic actuator 507, while movement of lower yoke plate 8b is effected by a reversing electric motor actuator M. Also, two separate heated melt distribution manifolds 502 are used. Further, melt feed to various mold cavity configurations is illustrated. Specifically, the right side of FIG. 9 shows an arrangement wherein the four branch melt bores of two heated valve gate nozzles feed a single large mold cavity 513a; to the left of that the two branch melt bores of a single heated valve gate nozzle feed a single smaller mold cavity 513b; and to the left of that the individual branch melt bores of a single heated valve gate nozzle feed individual smaller mold cavities 513c.

FIG. 10 illustrates how some of the features of the invention can be incorporated in a multi-cavity single-face molding system (like parts are denoted by like reference numerals). This embodiment essentially is the lower half of the embodiment of FIG. 9, i.e., the upper yoke plate 8a of FIG. 9 and all structure above it has been eliminated. A single two-cylinder, double-acting pneumatic actuator 607 is shown, but a reversing electric motor actuator (as per FIG. 9) may be used instead.

From the above it will be appreciated that the invention affords flexibility in construction and operation of a molding apparatus that is durable and relatively compact, and operates efficiently and reliably. While the features of the invention have been described in the context of one or more preferred embodiments, it will be evident that various modifications are possible without departing from the scope of the invention as understood by those skilled in the art and as defined by in the following claims.

CLAIMS

1. Injection molding apparatus comprising:

a first array of injection nozzles, each nozzle having a melt channel and a valve pin movable within the melt channel to open and close a mold gate;

a second array of injection nozzles, each nozzle having a melt channel and a valve pin movable within the melt channel to open and close a mold gate;

a melt distribution manifold between said first and second arrays of injection nozzles and in fluid communication with the arrays of nozzles;

a first actuating assembly for displacing the valve pins of the first array of injection nozzles, comprising at least one actuator and a common linkage element driven by the actuator and linked to all of the valve pins of the first array of injection nozzles to move the valve pins in unison; and

a second actuating assembly for displacing the valve pins of the second array of injection nozzles, comprising at least one actuator and a common linkage element driven by the actuator and linked to all of the valve pins of the second array of injection nozzles to move the valve pins in unison.

2. Injection molding apparatus according to claim 1, wherein each actuator provides motive force to its respective common linkage element in the direction of movement of the valve pins of its respective array of injection nozzles.

3. Injection molding apparatus according to claim 2, wherein the actuators of the first and second arrays of injection nozzles move in opposite directions to close the gates of their respective injection nozzles.

4. Injection molding apparatus according to claim 3, wherein each valve pin has a front end adjacent the gate of its respective nozzle and a remote rear end, and the common

linkage element of each array of injection nozzles engages the rear ends of its respective valve pins.

5. Injection molding apparatus according to claim 4, wherein each of the common linkage elements comprises a yoke plate guided for reciprocation in the direction of movement of the valve pins of its respective array of injection nozzles.

6. Injection molding apparatus according to claim 5, wherein each yoke plate is guided by at least two guide members which extend in the direction of movement of the valve pins of its respective array of injection nozzles.

7. Injection molding apparatus according to claim 1, wherein each of the common linkage elements comprises a yoke plate guided for reciprocation in the direction of movement of the valve pins of its respective array of injection nozzles.

8. Injection molding apparatus according to claim 7, wherein each yoke plate is guided by at least two guide members which extend in the direction of movement of the valve pins of its respective array of injection nozzles.

9. Injection molding apparatus according to claim 8, wherein each valve pin has a front end adjacent the gate of its respective nozzle and a remote rear end, and the common linkage element of each array of injection nozzles engages the rear ends of its respective valve pins.

10. Injection molding apparatus according to claim 7, wherein each valve pin has a front end adjacent the gate of its respective nozzle and a remote rear end, and the common linkage element of each array of injection nozzles engages the rear ends of its respective valve pins.

11. Injection molding apparatus according to claim 10, wherein the actuators of the first and second arrays of injection nozzles move in opposite directions to close the gates of their respective injection nozzles.

12. Injection molding apparatus comprising:

a first array of injection nozzles, each nozzle having a gate at its front end, a remote rear end and a valve pin movable within the nozzle, the valve pin having a front end adjacent the gate to open and close the gate and a remote rear end;

a second array of injection nozzles, each nozzle having a gate at its front end, a remote rear end and a valve pin movable within the nozzle, the valve pin having a front end adjacent the gate to open and close the gate and a remote rear end;

a melt distribution manifold between said first and second arrays of injection nozzles and in fluid communication with the rear ends of the injection nozzles;

a first actuating assembly for displacing the valve pins of the first array of injection nozzles, comprising a yoke plate engaging the rear ends of all of the valve pins of the first array of injection nozzles and guided for reciprocation in the direction of movement of the engaged valve pins, and at least one actuator driving the yoke plate to move the valve pins in unison; and

a second actuating assembly for displacing the valve pins of the second array of injection nozzles, comprising a yoke plate engaging the rear ends of all of the valve pins of the second array of injection nozzles and guided for reciprocation in the direction of movement of the engaged valve pins, and at least one actuator driving the yoke plate to move the valve pins in unison.

13. Injection molding apparatus according to claim 12, wherein each yoke plate is guided by at least two guide members which extend in the direction of movement of the valve pins of its respective array of injection nozzles.
14. Injection molding apparatus according to claim 13, wherein each of the guide members comprises a fixed pin which slidably engages a mating hole in the yoke plate.
15. Injection molding apparatus according to claim 14, wherein the interface between each fixed pin and its respective hole comprises a low-friction surface.
16. Injection molding apparatus according to claim 15, wherein each actuator provides motive force to its respective common linkage element in the direction of movement of the valve pins of its respective array of injection nozzles.
17. Injection molding apparatus according to claim 16, wherein a single centrally located actuator drives each yoke plate.
18. Injection molding apparatus according to claim 16, wherein two symmetrically located actuators drive each yoke plate.
19. Injection molding apparatus according to claim 13, wherein each actuator provides motive force to its respective common linkage element in the direction of movement of the valve pins of its respective array of injection nozzles.
20. Injection molding apparatus according to claim 19, wherein a single centrally located actuator drives each yoke plate.
21. Injection molding apparatus according to claim 19, wherein two symmetrically located actuators drive each yoke plate.
22. Injection molding apparatus according to claim 1, wherein the actuators are of a type selected from the group consisting of pneumatically powered, hydraulically powered and electrically powered actuators.

23. Injection molding apparatus according to claim 22, wherein all of the actuators are of the same type.
24. Injection molding apparatus according to claim 22, wherein the actuators of the first actuating assembly are of one type, and the actuators of the second actuating assembly are of a type different from the actuators of the first actuating assembly.
25. Injection molding apparatus according to claim 1, wherein the actuators comprise fluid-driven pistons.
26. Injection molding apparatus according to claim 1, wherein the actuators of each actuating assembly flank the injection nozzles that they actuate.
27. Injection molding apparatus according to claim 1, wherein the actuators of each actuating assembly are centrally located among the injection nozzles that they actuate.
28. Injection molding apparatus according to claim 1, wherein each of the valve pins has a driven portion engaged by its respective common linkage element and a tip end that controls melt flow through its respective mold gate, and the at least one actuator of each actuating assembly is located between the common linkage element and the tip ends of the valve pins that it actuates.
29. Injection molding apparatus according to claim 28, comprising a plurality of actuators driving each common linkage element, wherein the actuators of each actuating assembly flank the injection nozzles that they actuate.
30. Injection molding apparatus according to claim 28, wherein the at least one actuator of each actuating assembly is centrally located among the injection nozzles that it actuates.
31. Injection molding apparatus according to claim 1, wherein at least one of the injection nozzles has a plurality of melt channels and a plurality of valve pins.

32. Injection molding apparatus according to claim 1, wherein a plurality of the injection nozzles communicate with a single mold cavity.

33. Injection molding apparatus according to claim 1, wherein at least one of the injection nozzles communicates with a plurality mold cavities.

34. Injection molding apparatus according to claim 1, wherein the injection nozzles communicate with mold cavities of various types and sizes to form articles of various shapes and sizes.

35. Injection molding apparatus according to claim 1, wherein there are a plurality of separate melt distribution manifolds, and separate groups of injection nozzles communicate with separate ones of said melt distribution manifolds.

36. Injection molding apparatus comprising:

an array of injection nozzles, each nozzle having a melt channel and a valve pin movable within the melt channel, each valve pin having a driven portion and a tip end that controls melt flow through a mold gate;

a melt distribution manifold in fluid communication with the array of injection nozzles; and

an actuating assembly for displacing the valve pins of the array of injection nozzles, comprising at least one actuator and a common linkage element driven by the actuator and linked to the driven portions of all of the valve pins of the array of injection nozzles to move the valve pins in unison, wherein the at least one actuator is located between the common linkage element and the tip ends of the valve pins.

37. Injection molding apparatus according to claim 36, comprising a plurality of actuators driving the common linkage element, the actuators flanking the injection nozzles.

38. Injection molding apparatus according to claim 36, wherein the at least one actuator is centrally located among the injection nozzles.

39. Injection molding apparatus comprising:

an array of injection nozzles, each nozzle having a melt channel and a valve pin movable within the melt channel, each valve pin having a driven portion and a tip end that controls melt flow through a mold gate;

a melt distribution manifold in fluid communication with the array of injection nozzles; and

an actuating assembly for displacing the valve pins of the array of injection nozzles, comprising at least one actuator and a common linkage element driven by the actuator and linked to the driven portions of all of the valve pins of the array of injection nozzles to move the valve pins in unison, wherein the at least one actuator is located between the melt distribution manifold and the tip ends of the valve pins.

40. Injection molding apparatus according to claim 39, wherein the common linkage element is located between the melt distribution manifold and the tip ends of the valve pins.

ABSTRACT

A stack injection molding apparatus has first and second arrays of valve gate injection nozzles and separate mechanisms for independently actuating the nozzles of each array. A separate reciprocating yoke plate engages the valve pins of each nozzle array, and is actuated by either one centrally located actuator or a pair of symmetrically located actuators.

002.381261.2

FIG. 1 is a cross-sectional view of a multi-cylinder internal combustion engine, showing the arrangement of the cylinders, pistons, and valves.


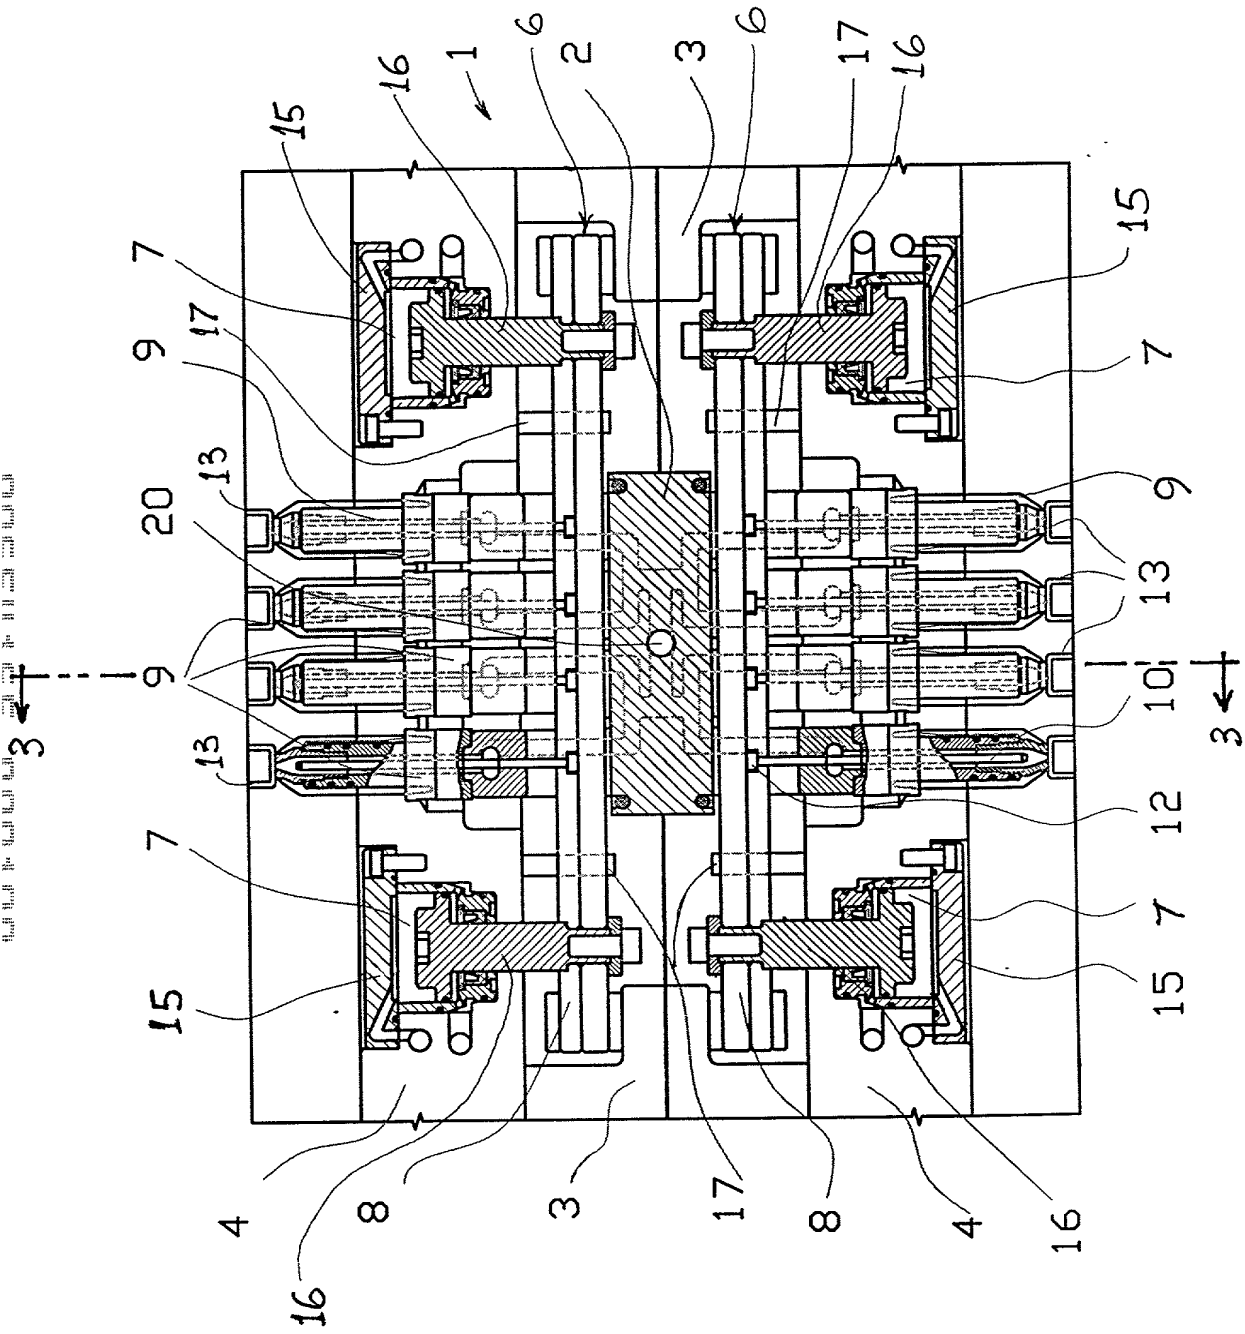


FIG. 1

FIG. 2 is a cross-sectional view of the device in a closed position, taken along the line 4-4 of FIG. 1.

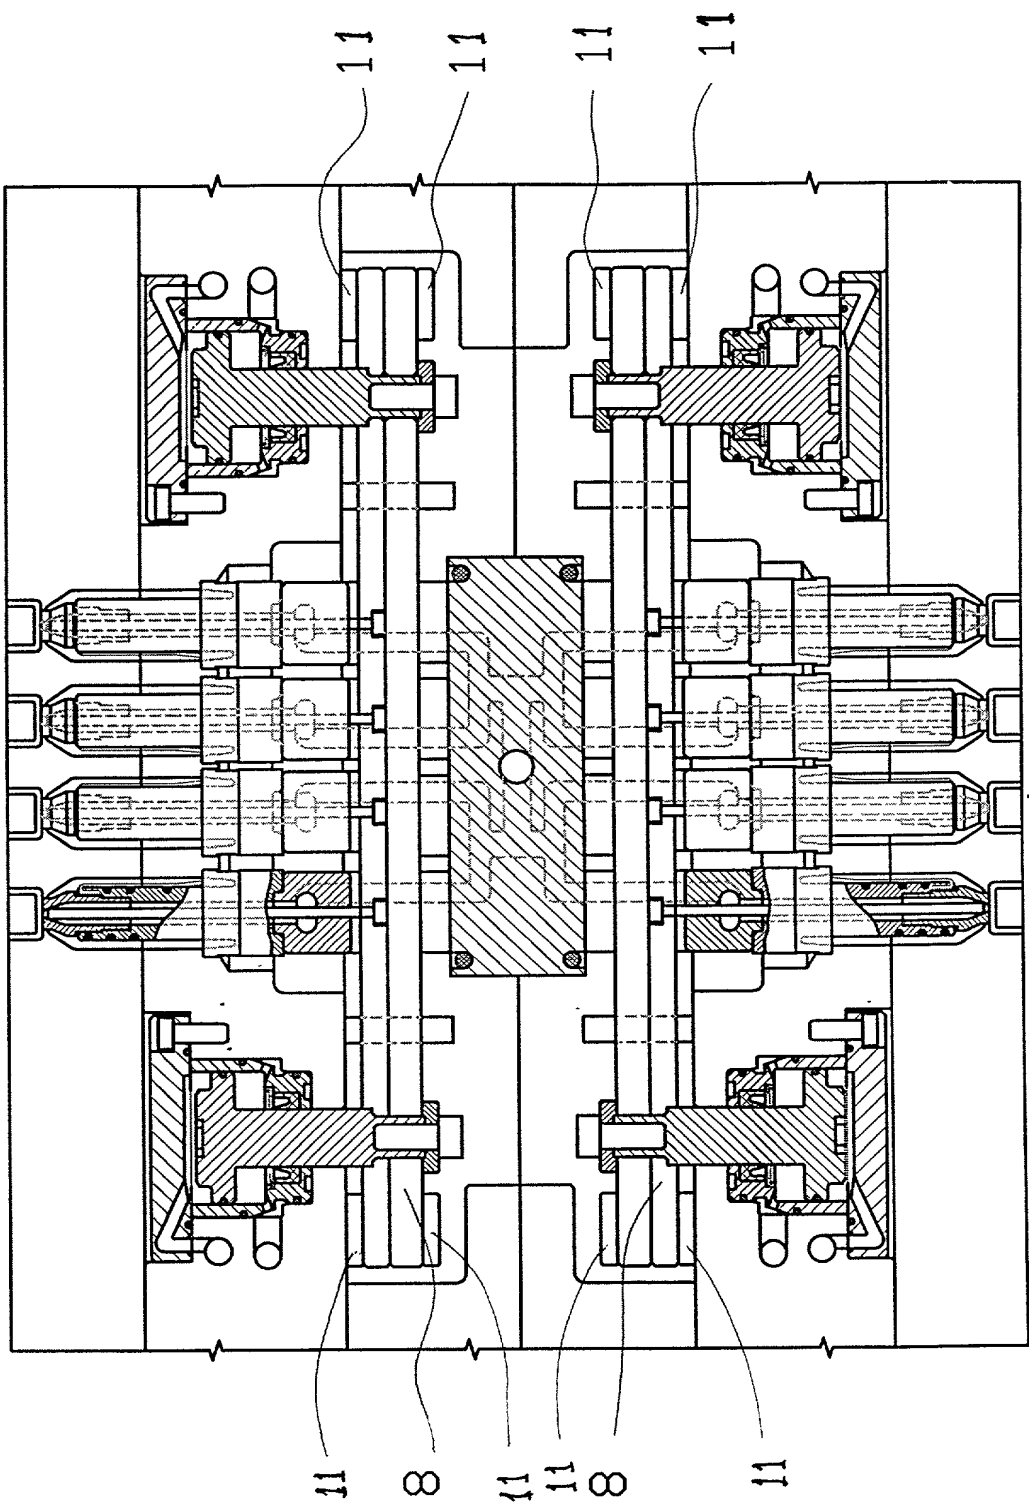

4-4

FIG. 2

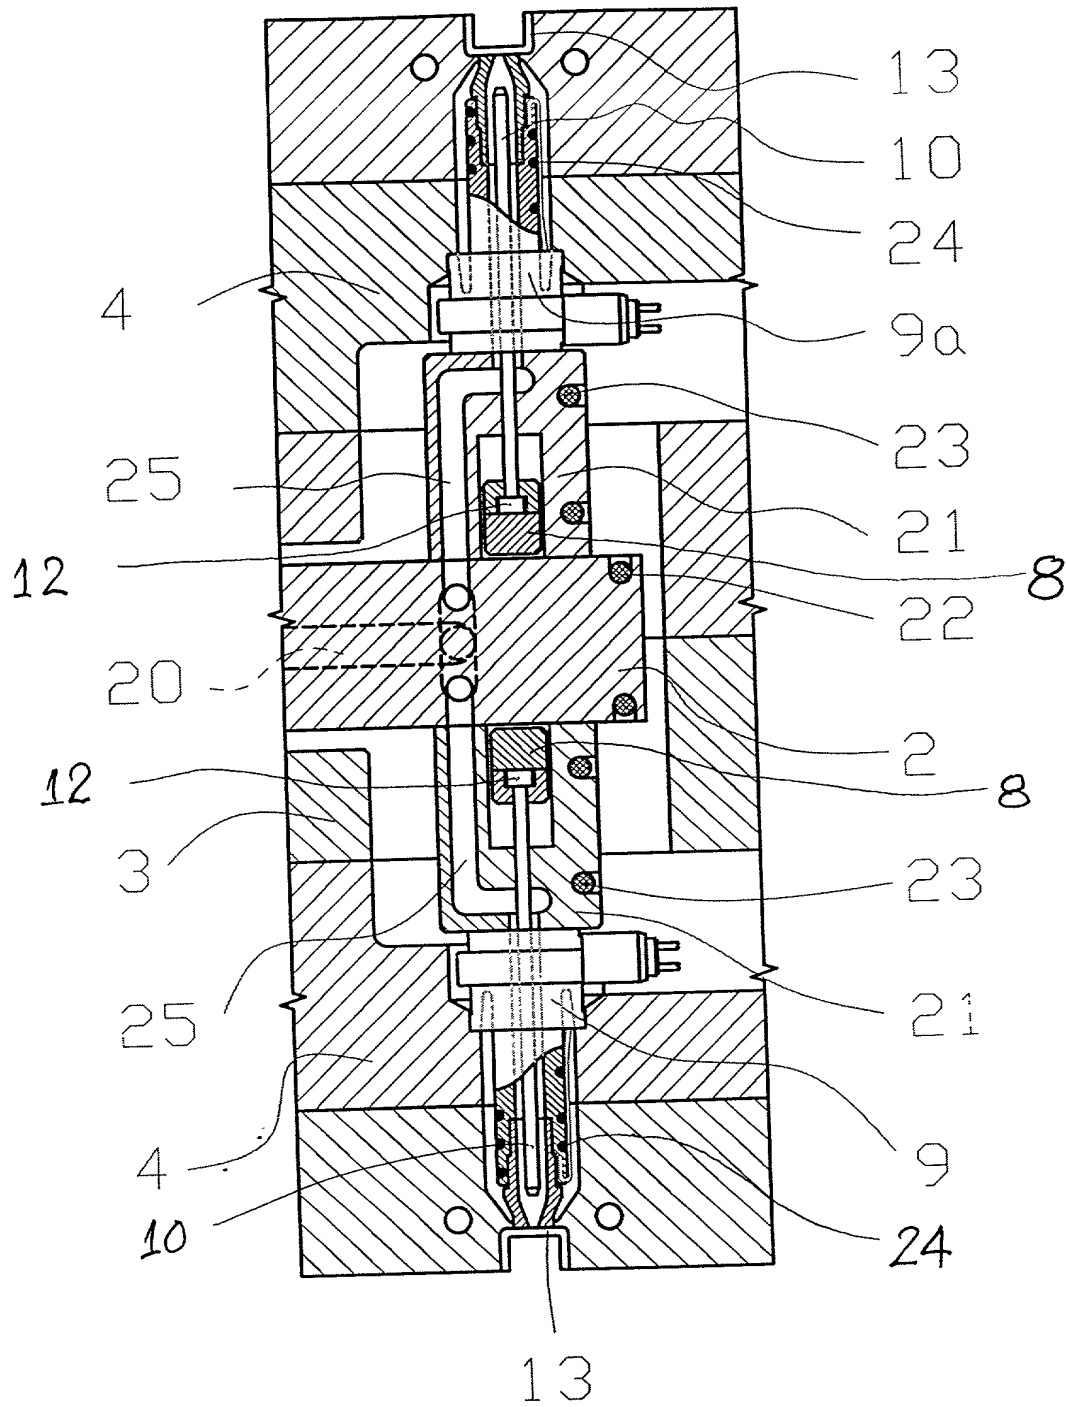


FIG. 3

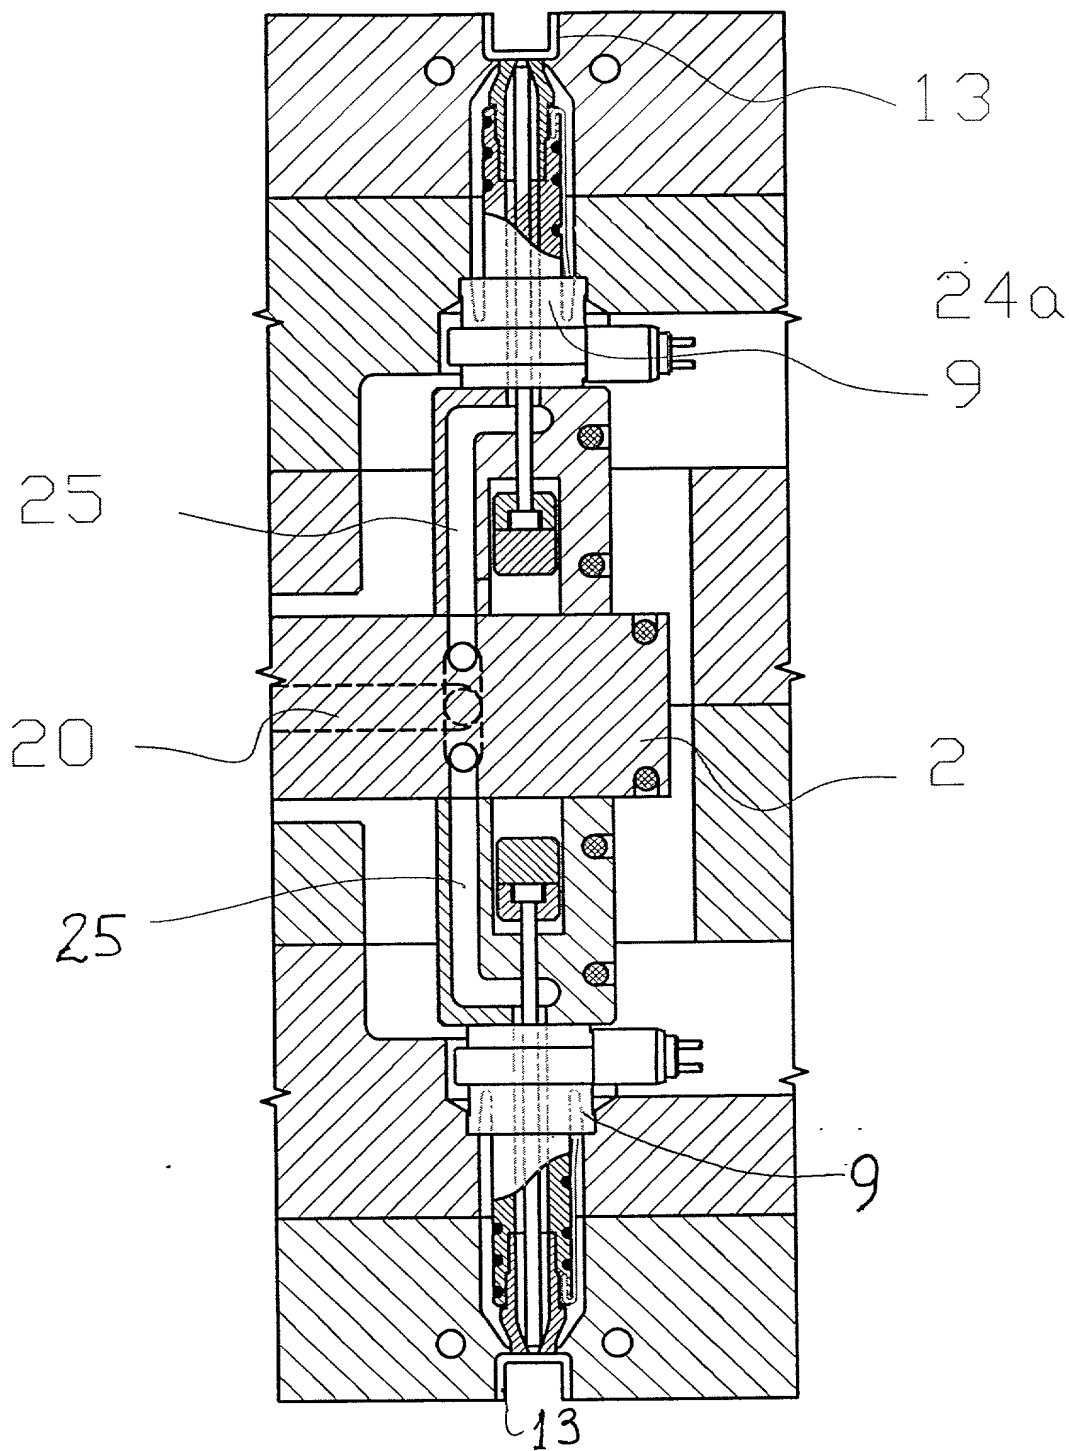


FIG. 4

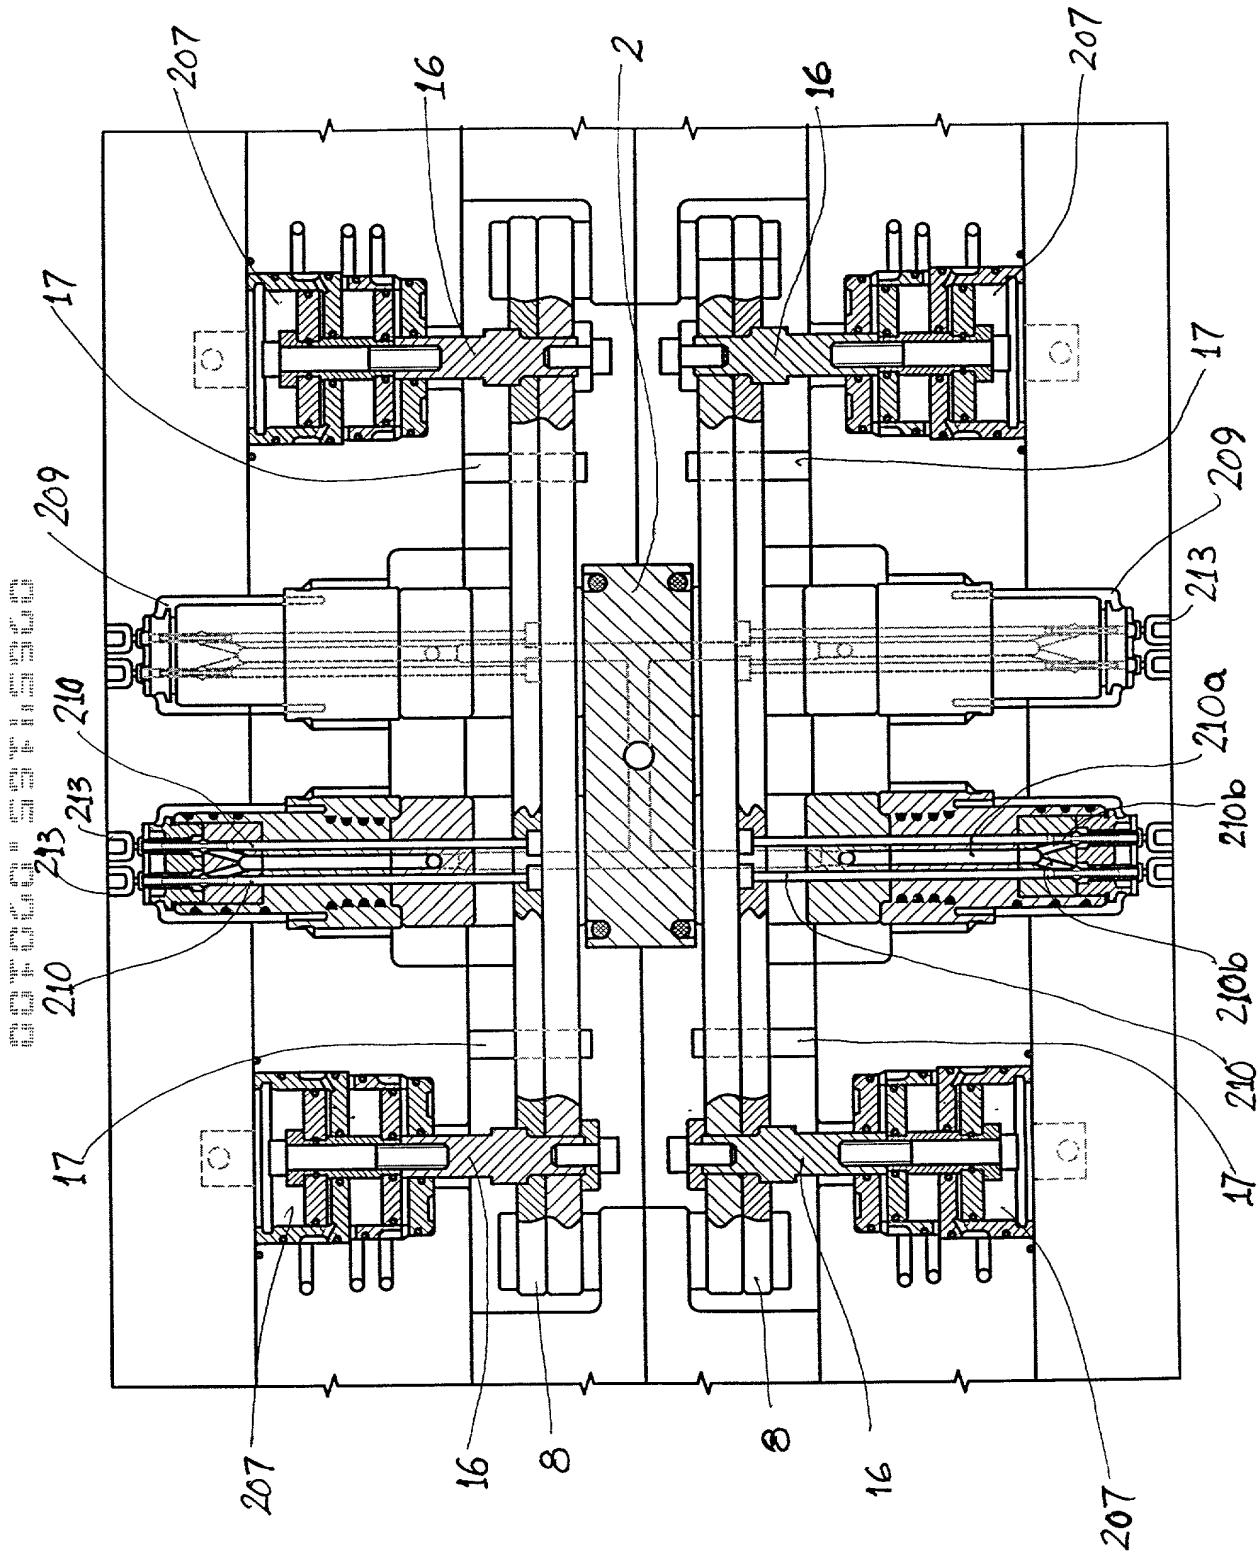


FIG. 5

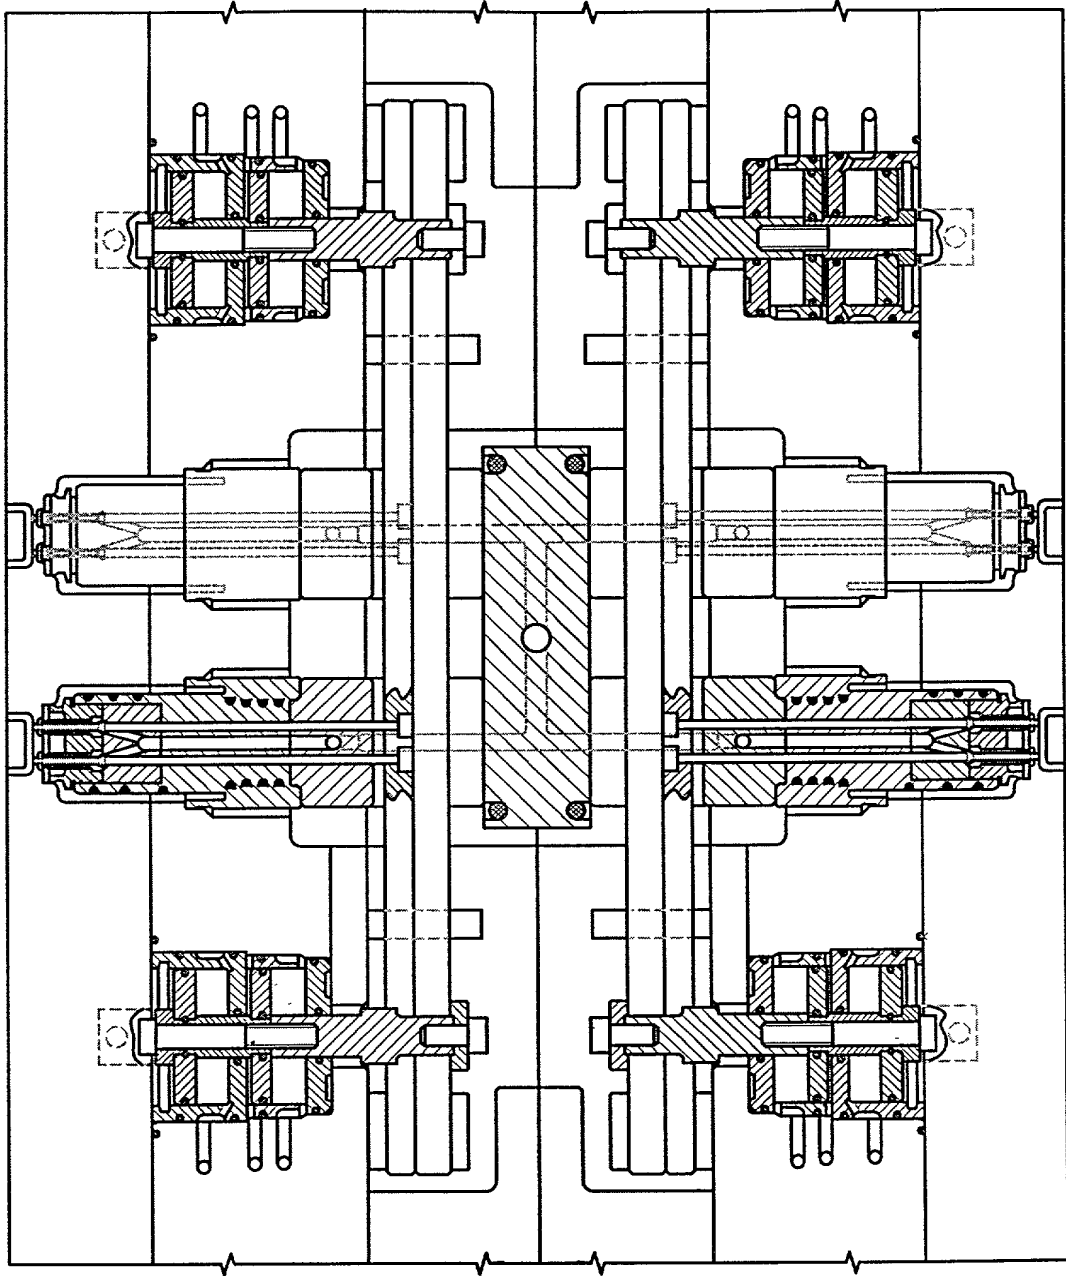


FIG. 6

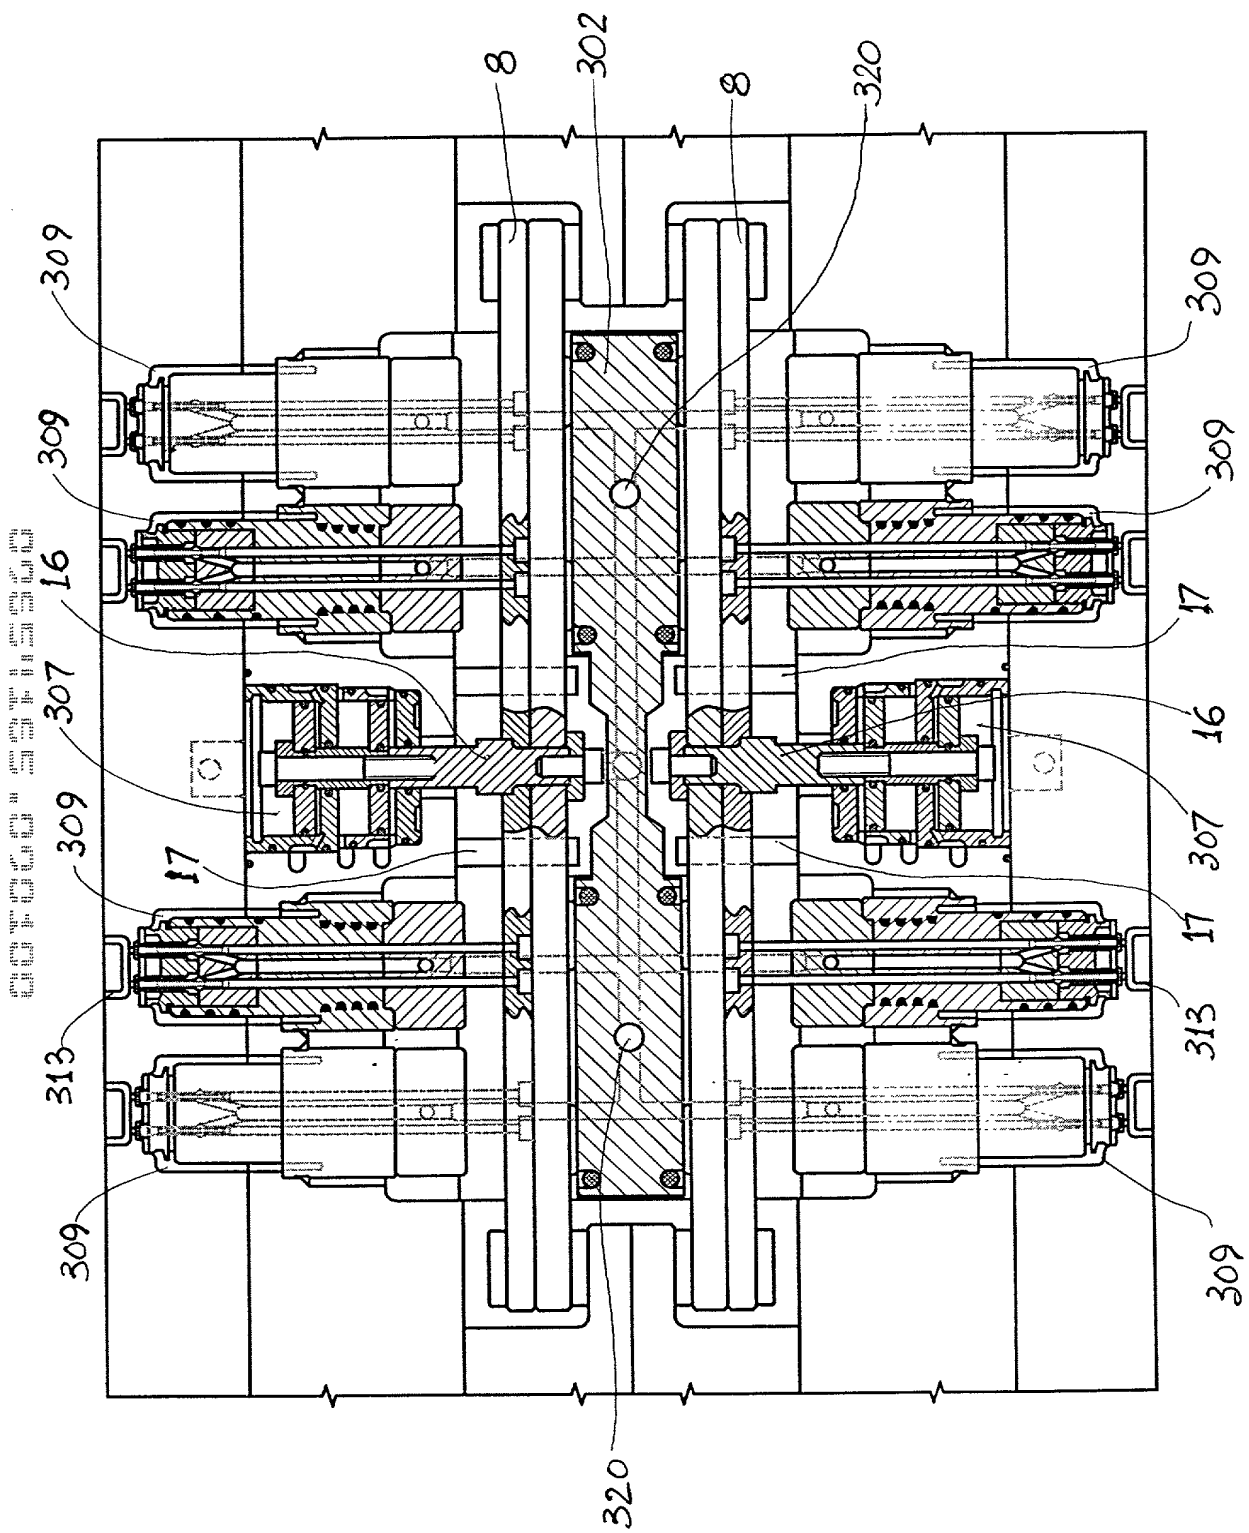


FIG. 7

FIG. 8

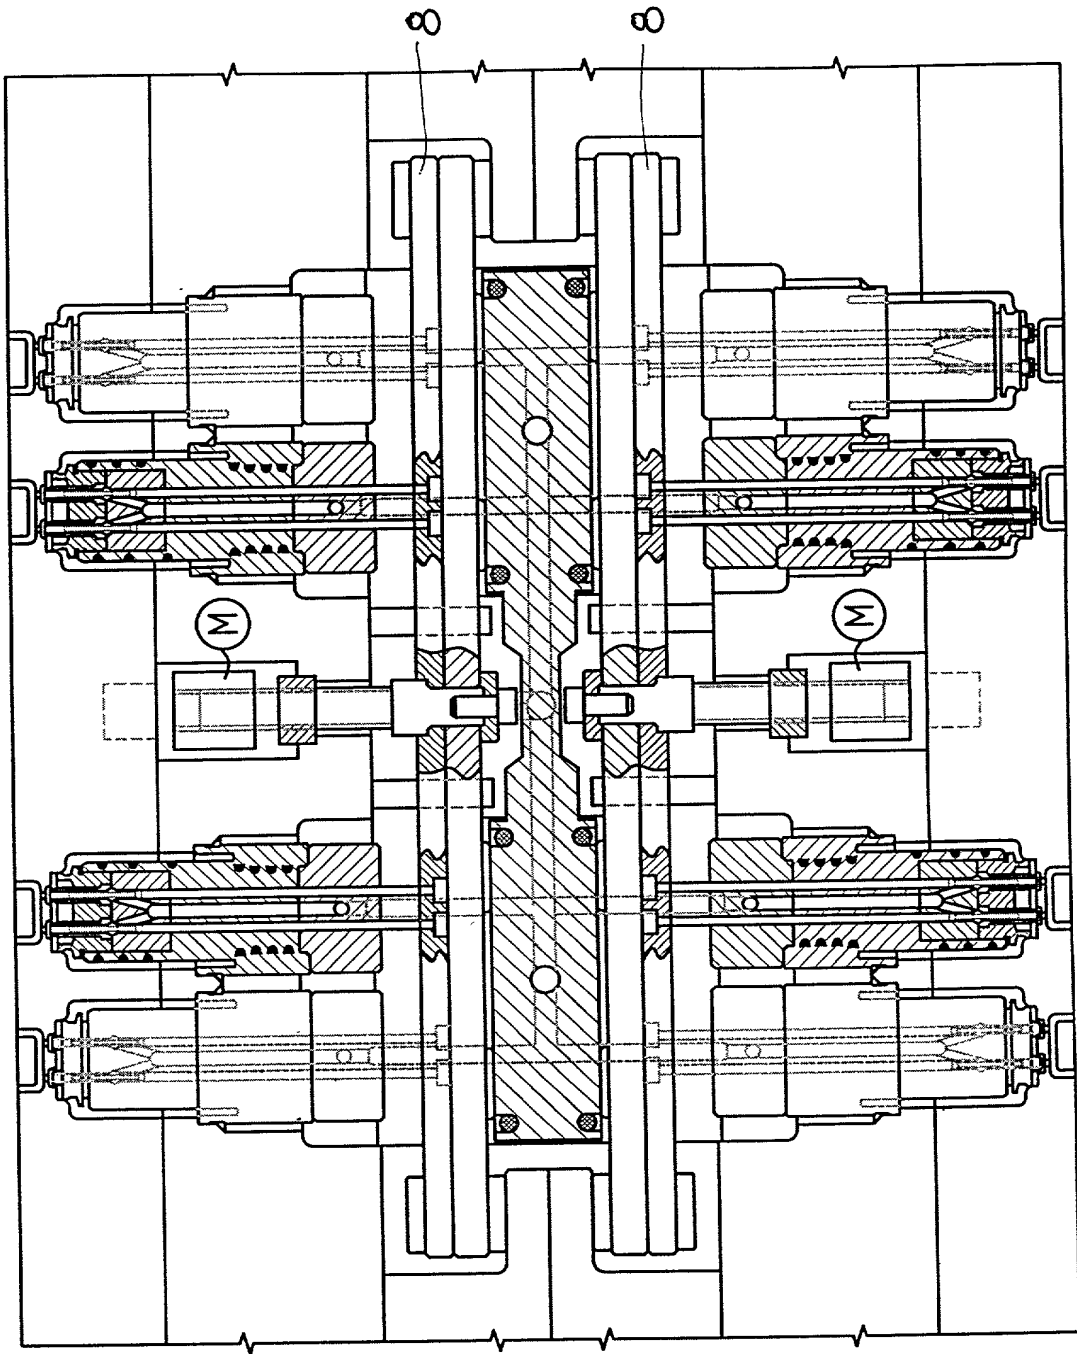


FIG. 9 is a cross-sectional view of the device in a closed position, showing the internal components and the sealing arrangement.

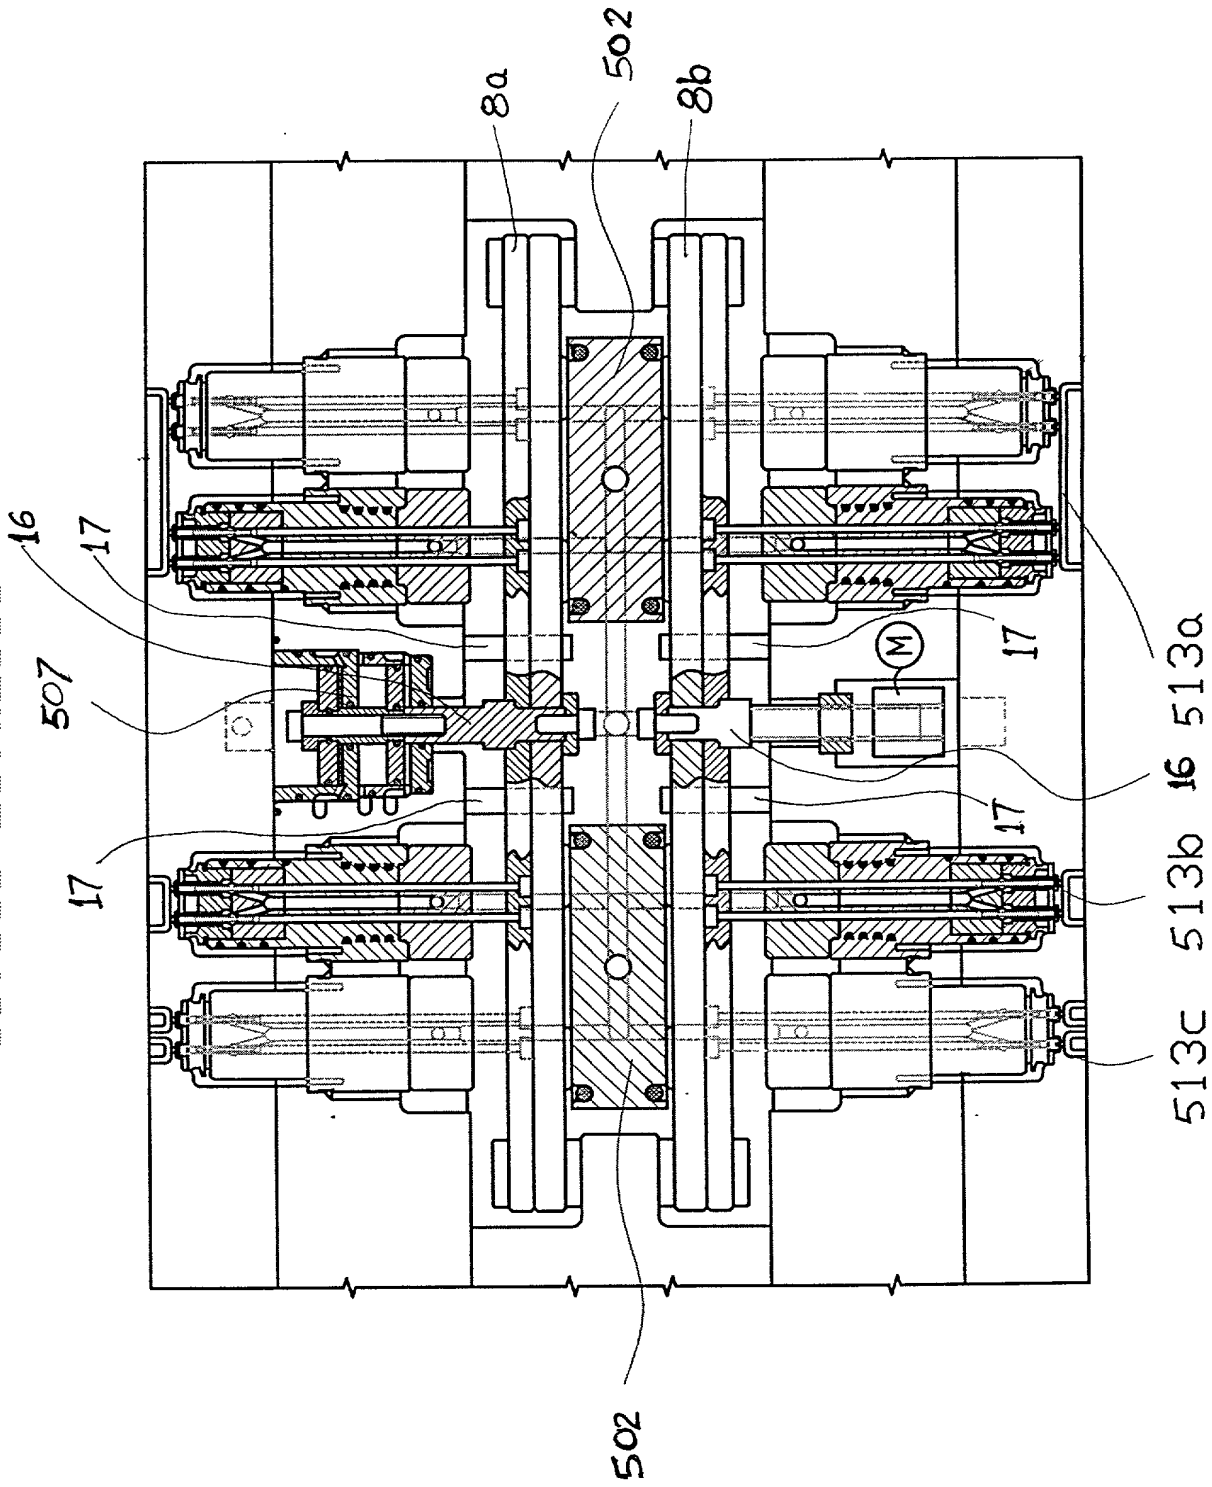


FIG. 9

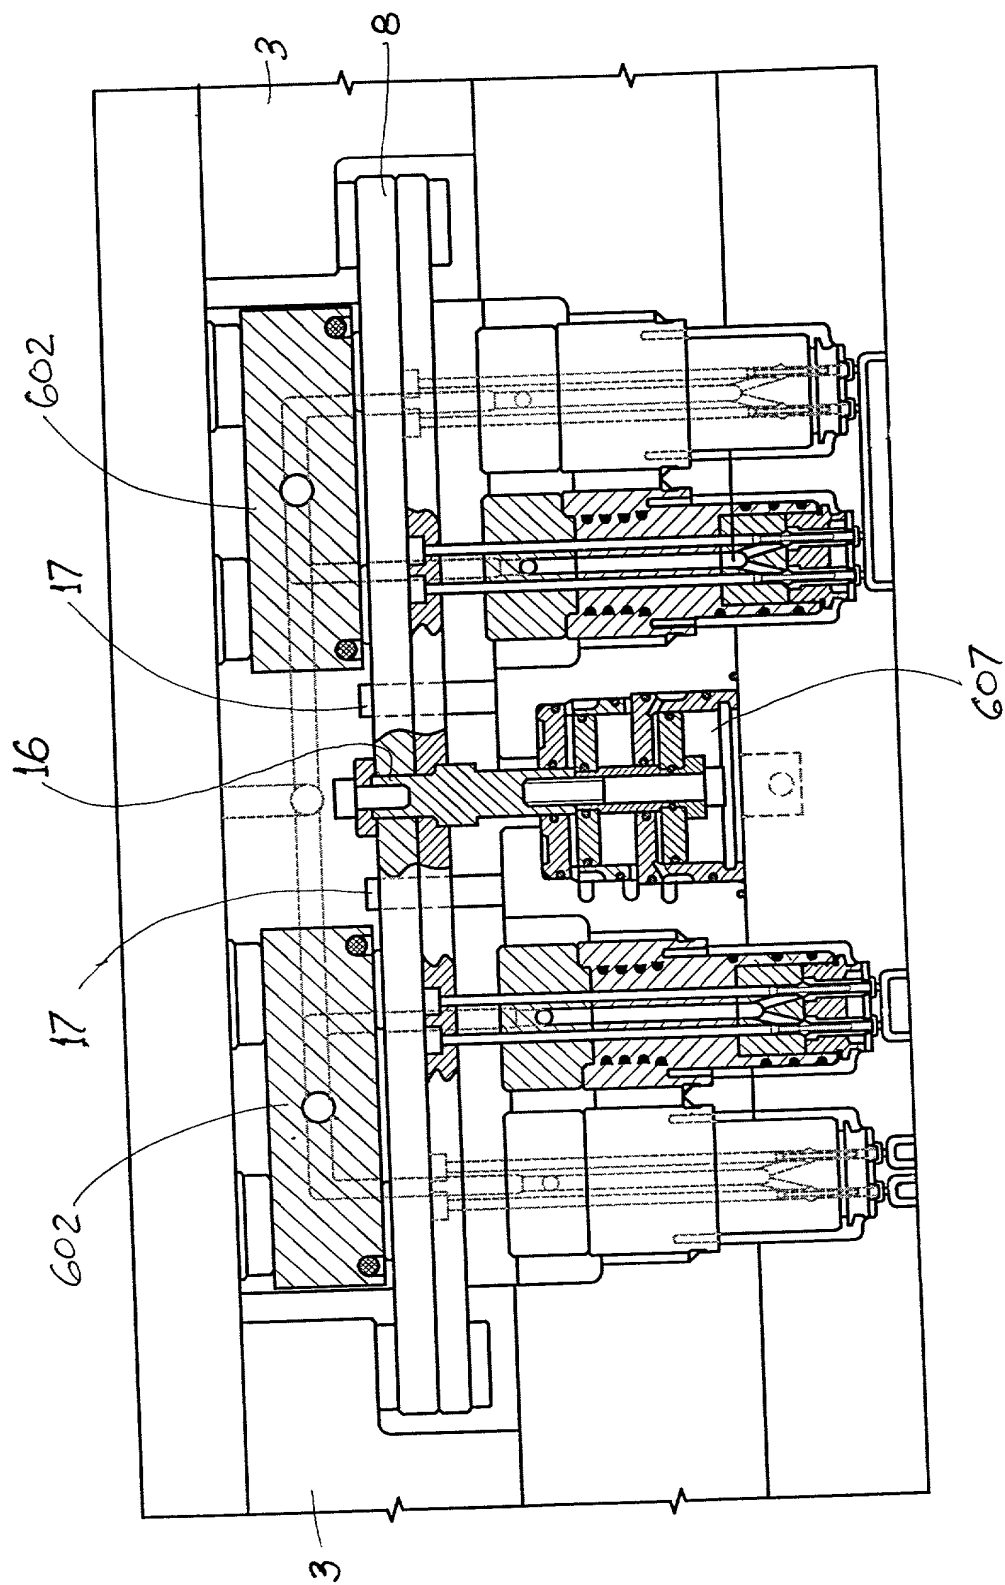


FIG. 10

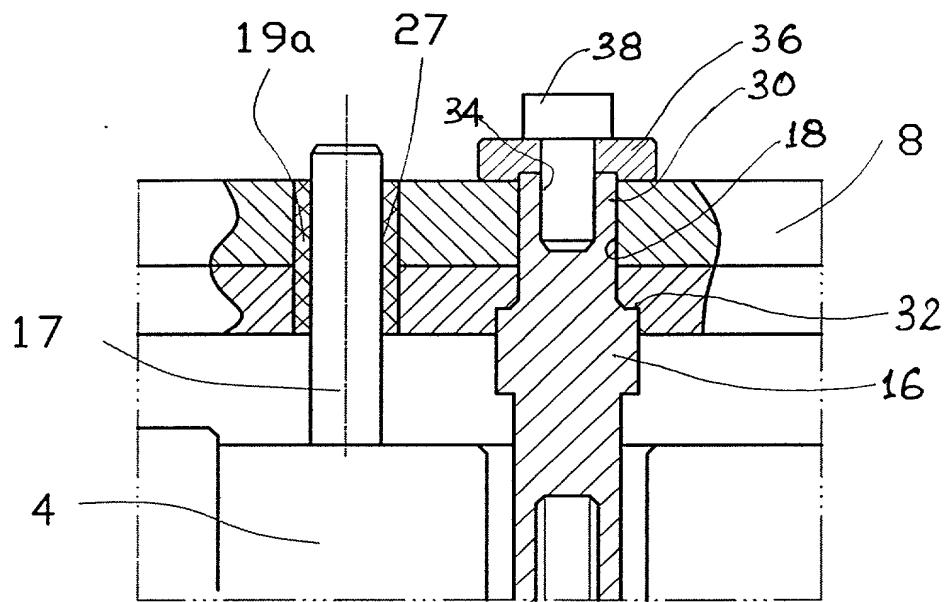


FIG. 11

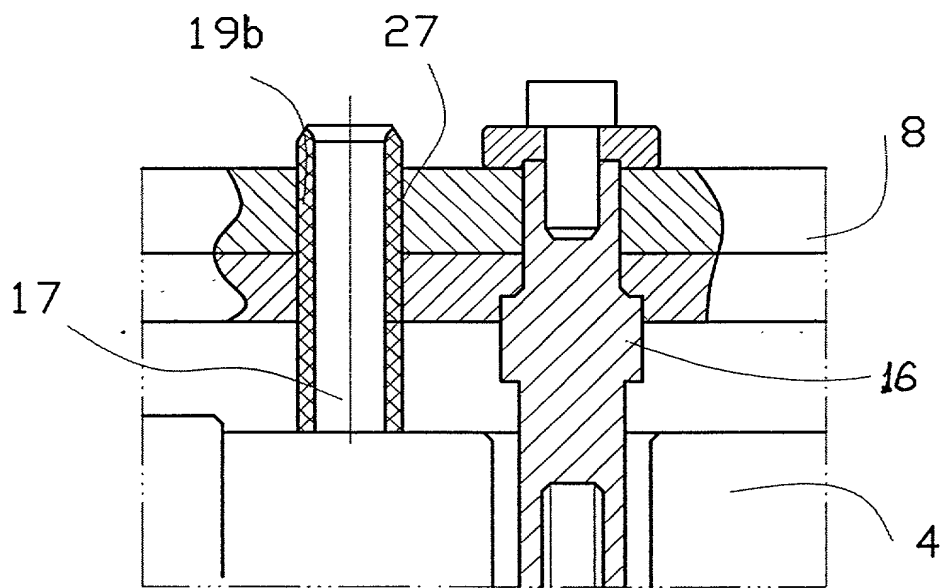


FIG. 12

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I HEREBY DECLARE:

THAT my residence, post office address, and citizenship are as stated below next to my name;

THAT I believe I am the original, first, and sole inventor (if only one inventor is named below) or an original, first, and joint inventor (if plural inventors are named below or in an attached Declaration) of the subject matter which is claimed and for which a patent is sought on the invention entitled

STACK INJECTION MOLDING APPARATUS WITH SEPARATELY ACTUATED ARRAYS OF VALVE GATES

(Attorney Docket No. 043931/0114)

the specification of which (check one)

_____ is attached hereto.

 X was filed on September 1, 2000 as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

THAT I do not know and do not believe that the same invention was ever known or used by others in the United States of America, or was patented or described in any printed publication in any country, before I (we) invented it;

THAT I do not know and do not believe that the same invention was patented or described in any printed publication in any country, or in public use or on sale in the United States of America, for more than one year prior to the filing date of this United States application;

THAT I do not know and do not believe that the same invention was first patented or made the subject of an inventor's certificate that issued in any country foreign to the United States of America before the filing date of this United States application if the foreign application was filed by me (us), or by my (our) legal representatives or assigns, more than twelve months (six months for design patents) prior to the filing date of this United States application;

THAT I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment specifically referred to above;

THAT I believe that the above-identified specification contains a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the invention, and sets forth the best mode contemplated by me of carrying out the invention; and

THAT I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I HEREBY CLAIM foreign priority benefits under Title 35, United States Code § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith:

STEPHEN A. BENT	Reg. No. 29,768
DAVID A. BLUMENTHAL	Reg. No. 26,257
BETH A. BURROUS	Reg. No. 35,087
ALAN I. CANTOR	Reg. No. 28,163
WILLIAM T. ELLIS	Reg. No. 26,874
JOHN J. FELDHAUS	Reg. No. 28,822
PATRICIA D. GRANADOS	Reg. No. 33,683
JOHN P. ISACSON	Reg. No. 33,715

MICHAEL D. KAMINSKI	Reg. No. 32,904
LYLE K. KIMMS	Reg. No. 34,079
KENNETH E. KROSIN	Reg. No. 25,735
JOHNNY A. KUMAR	Reg. No. 34,649
GLENN LAW	Reg. No. 34,371
PETER G. MACK	Reg. No. 26,001
BRIAN J. MC NAMARA	Reg. No. 32,789
SYBIL MELOY	Reg. No. 22,749
RICHARD C. PEET	Reg. No. 35,792
GEORGE E. QUILLIN	Reg. No. 32,792
COLIN G. SANDERCOCK	Reg. No. 31,298
BERNHARD D. SAXE	Reg. No. 28,665
CHARLES F. SCHILL	Reg. No. 27,590
RICHARD L. SCHWAAB	Reg. No. 25,479
ARTHUR SCHWARTZ	Reg. No. 22,115
HAROLD C. WEGNER	Reg. No. 25,258

and I request that all correspondence be directed to:

Alan I. Cantor
 FOLEY & LARDNER
 Washington Harbour
 3000 K Street, N.W., Suite 500
 Washington, D.C. 20007-5109

Telephone: (202) 672-5570
 Facsimile: (202) 672-5399

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of first inventor	Itsuto NAKANISHI
Residence	Toronto, Canada
Citizenship	Japanese
Post Office Address	48 Howland Avenue, Toronto, Ontario, Canada M5R 3B3
Inventor's signature	
Date	